

PCA-375-PR 020 – Compact AC Gage Head



- Ultra compact design for limited spaces
- Slim 0.375 inch [9.5mm] diameter
- Radial cable exit
- Rugged polyurethane cable
- ± 0.02 inch (± 0.51 mm) stroke
- 40 μ -inch [1 μ m] repeatability
- 4-48 AGD interchangeable contact tips

DESCRIPTION

The **PCA-375 PR-020** gage head is an ultra-compact device that provides accurate measurement in areas with limited space. Utilizing a radial cable exit, the slim, low profile of the PCA-375 PR-020 easily fits within miniature fixtures and small inside diameters. With the time proven reliability of its LVDT (Linear Variable Differential Transformer) and measuring just 0.375 inch [9.5mm] in diameter the PCA-375 PR-020 affords non-intrusive, slim profile measurements, making it the perfect choice for high density fixtures as well as numerous other industrial applications.

Externally, the PCA-375 PR-020 is constructed of 300 Series stainless steel, with a field replaceable chrome plated hardened tool steel contact tip. Internally, the LVDT, along with a permanently lubricated bronze bearing and plunger assembly, provide long term repeatability and reliability. Electrical termination is via a 2 meter long, 6 conductor, shielded polyurethane jacketed cable.

Like in most of our LVDTs, the PCA-375 PR-020 windings are vacuum impregnated with a specially formulated, high temperature, flexible resin, and the coil assembly is potted inside its housing with a two-component epoxy. This provides excellent protection against hostile environments such as high humidity, vibration and shock.

Designed to service applications with limited space availability, the PCA-375 PR-020 is ideal for bore gages, or in practically any location where space is at a premium. Available with optional pre-wired connectors, and a variety of replaceable contact tips, it can be installed directly into standard AGD dial indicator mounting hardware without modification, affording maximum versatility.

MEAS acquired Schaevitz Sensors and the **Schaevitz™** trademark in 2000.

FEATURES

- Compact, slim profile
- 90° cable exit
- 2.6oz [73 Grams] spring force
- Stainless Steel construction
- Excellent stroke to length ratio
- Connector Options Available (*Consult Factory*)
- Calibration certificate supplied with each unit

APPLICATIONS

- High density gaging fixtures
- Bore gages
- Gaging of intricate parts
- Space restricted areas
- Short stroke measurements
- Pressing Applications

PCA-375-PR 020 – Compact AC Gage Head

PERFORMANCE SPECIFICATIONS

ELECTRICAL SPECIFICATIONS	
Parameter	PCA-375-PR 020
Stroke/gaging range	±0.020 [0.51]
Sensitivity, V/V/inch [mV/V/mm]	5.0 [197]
Output at stroke ends (*)	100 mV/V
Non-linearity, maximum	±0.50% of FR
Phase shift	+60°
Input impedance (Primary)	94.5 Ω
Output impedance (Secondary)	214 Ω
Input voltage, maximum	3.5 VRMS sine wave
Input frequency range	2.5kHz to 10kHz
Test input frequency	5kHz
Repeatability	40 micro-inches [1 micron]
Null voltage, maximum	0.75% of FRO

ENVIRONMENTAL SPECIFICATIONS & MATERIALS	
Operating temperature	0°F to 250°F (-18°C to 121°C)
Housing material	AISI 300 Series stainless steel
Electrical connection	Six AWG 32 conductor, shielded polyurethane jacket cable, 6.5 foot [2 meter] long
NEMA IEC 60529 rating	IP-66 (at cable exit), IP-60 (at the plunger)

Notes:

All values are nominal unless otherwise noted


Dimensions are in inch [mm] unless otherwise noted

(*): Unit for output at stroke ends is millivolt per volt of excitation (Input voltage)

FR: Full Range is the stroke range, end to end; $FR=2 \times S$ for $\pm S$ stroke range

FRO (Full Range Output): Algebraic difference in outputs measured at the ends of the range

WIRING INFORMATION

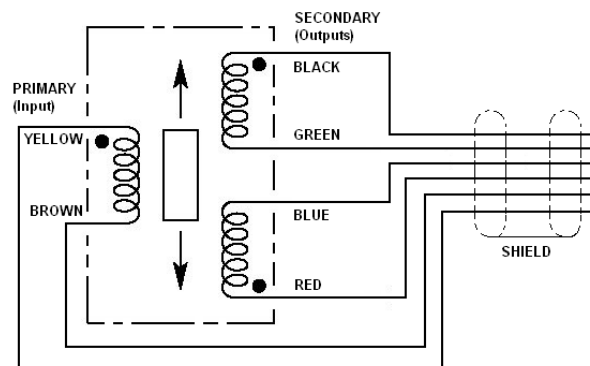


Connect Blue and Green wires together for differential output


PCA-375-PR 020 – Compact AC Gage Head

MECHANICAL SPECIFICATIONS

Parameter	PCA-375-PR 020
Pre-travel, minimum	0.002 [0.05]
Total stroke	0.060 [1.52]
Spring force	2.6 oz [73 Grams) @ null position

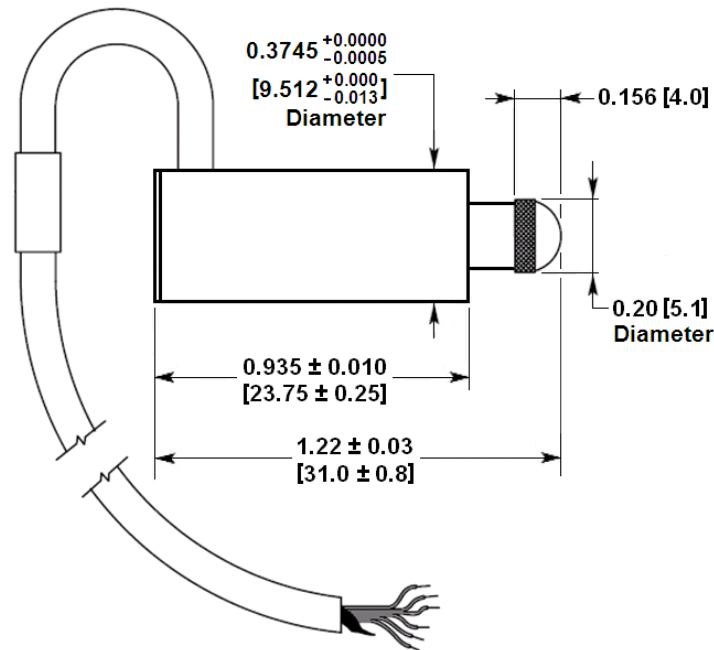

REPLACEMENT/OPTIONAL CONTACT TIPS

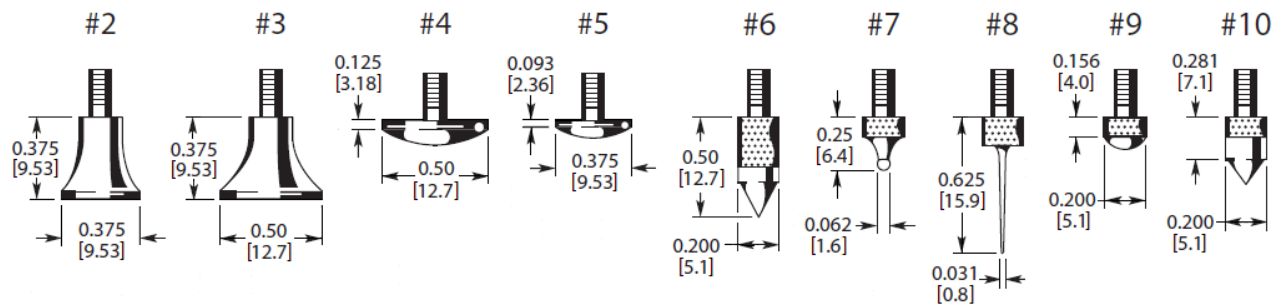

Dimensions are in inch [mm]

PCA-375-PR 020 – Compact AC Gage Head

ORDERING INFORMATION

Description	Model	Part Number
±0.020 inch gage head	PCA-375 PR-020	02350729-000

ACCESSORIES		
Description	Model	Part Number
Replacement contact tips	Contact Tip 2	67010005-000
	Contact Tip 3	67010006-000
	Contact Tip 4	67010002-000
	Contact Tip 5	67010007-000
	Contact Tip 6	67010008-000
	Contact Tip 7	67010009-000
	Contact Tip 8	67010010-000
	Contact Tip 9	67010001-000
	Contact Tip 10	67010011-000

Also refer to our [“Options and Accessories for Gage Heads”](#) brochure

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com