

# Model 1210F Accelerometer



MEMS DC Response  
Durable Cable, Integral Relief  
Temperature Compensation  
Reliable Performance

The **Model 1210F** accelerometer is a small, compact uniaxial MEMS accelerometer designed for vehicle impact and road testing. Its mechanical overload stops provide high shock protection in rugged applications. Featuring ranges from 2g to 200g and frequency response to 2000 Hz, this sensor is easily mounted in hard to get places on vehicles under test.

## FEATURES



- $\pm 2g$  to  $\pm 200g$  Dynamic Range
- Environmentally Sealed
- $-40^{\circ}\text{C}$  to  $+100^{\circ}\text{C}$  Operating Range
- Rugged Strain Relief
- Mechanical Overload Stops
- Gas Damping
- mV Output
- Bolt Mounted

## APPLICATIONS

- Crash Testing
- Impact Testing
- Off-Road Testing
- Vehicle Testing



## dimensions

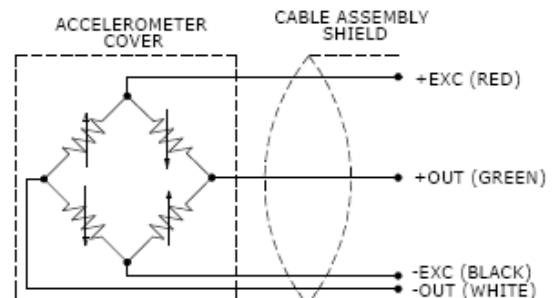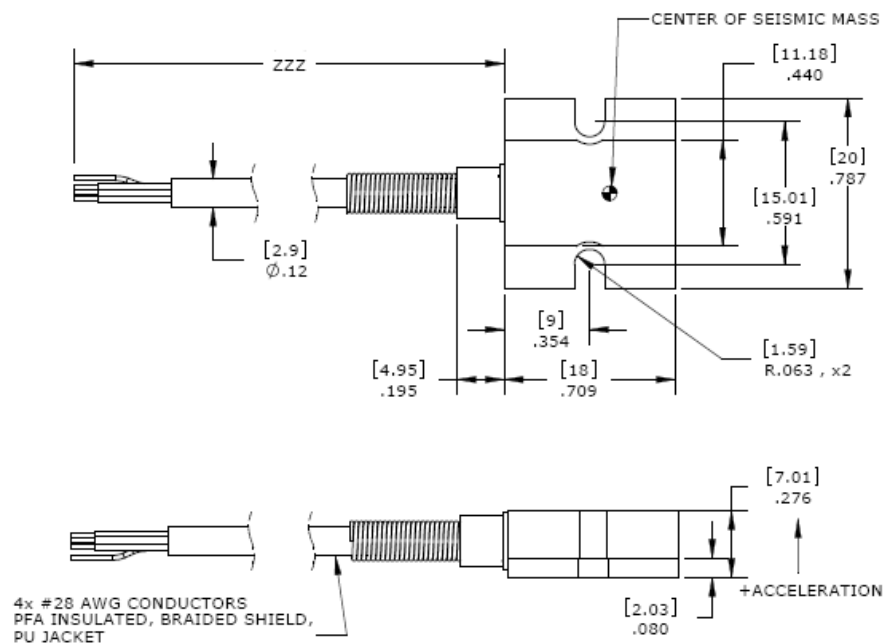

# Model 1210F Accelerometer

## performance specifications

All values are typical at +24°C, 100Hz and 10Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1004 for Plug & Play DC Accelerometers.

### Parameters

#### DYNAMIC

	±2	±5	±10	±20	±50	±100	±200	Notes
Range (g)	±2	±5	±10	±20	±50	±100	±200	
Sensitivity (mV/g) <sup>1</sup>	27	16	9	4.5	2	0.9	0.7	@10Vdc Excitation
Frequency Response (Hz)	0-100	0-200	0-300	0-400	0-800	0-1300	0-1500	±5%
Frequency Response (Hz)	0-200	0-300	0-400	0-500	0-1000	0-1500	0-1800	±1dB
Phase Response	0-50	0-60	0-70	0-100	0-300	0-500	0-500	<±5°
Natural Frequency (Hz)	700	800	1000	1500	4000	6000	7000	
Non-Linearity (%FSO)	±1	±1	±1	±1	±1	±1	±1	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<3	
Damping Ratio	0.7	0.7	0.7	0.7	0.6	0.6	0.5	
Shock Limit (g)	5000	5000	5000	5000	5000	5000	5000	

#### ELECTRICAL

Zero Acceleration Output (mV)	±40							Differential
Excitation Voltage (Vdc)	2 to 10							
Input Resistance (Ω)	2400-5000							
Output Resistance (Ω)	2400-5000							
Insulation Resistance (MΩ)	>100							@50Vdc
Residual Noise (μV RMS)	10							Maximum
Ground Isolation	Isolated from Mounting Surface							

#### ENVIRONMENTAL

Thermal Zero Shift (%FSO/°C)	±0.05
Thermal Sensitivity Shift (%/°C)	-0.20 ±0.05
Operating Temperature (°C)	-40 to +100
Compensated Temperature (°C)	-20 to +85
Storage Temperature (°C)	-40 to +100
Humidity	Epoxy Sealed

#### PHYSICAL

Case Material	Anodized Aluminum
Cable	PFA Insulated Leads, Braided Shield, Polyurethane Jacket
Weight (grams)	3.5
Mounting	2x #4 or M3 Screws
Mounting Torque	4.0 lb-in (0.5 N-m)
AWG	#28

<sup>1</sup> Output is ratiometric to excitation voltage

**Wiring color code:** +Excitation = Red; -Excitation = Black; +Output = Green; -Output = White;

**Calibration supplied:** CS-FREQ-0100 NIST Traceable Amplitude Calibration from 20Hz to ±5% Frequency Response Limit

**Supplied accessories:** 2x #4-40 (1/4" length) Socket Head Cap Screw and Washer

**Optional accessories:** 101 Three Channel DC Signal Conditioner Amplifier  
140 Auto-zero Inline Amplifier

## ordering info

**PART NUMBERING** Model Number+Range+Cable Length

1210F-XXXX-ZZZ

| | Cable (360 is 360 inches)  
| Range (0050 is 50g)

Example: 1210F-0050-360

Model 1210F, 50g, 360" (30ft) Cable

## 联系方式



深圳市亿为测控电子有限公司  
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com

www.bill-well.com

深圳市亿为测控电子有限公司