

Model 53 & 53A Accelerometer



Triaxial DC Accelerometer
 Low Cost, High Performance
 $\pm 50g$ to $\pm 2000g$ Range
 Low Profile, Adhesive Mount



The Model 53 Accelerometer is a small, compact triaxial device designed for vehicle impact and road testing. The accelerometer incorporates gas-damped MEMS sensing elements with mechanical stops for high overload protection. Featuring ranges from $\pm 50g$ to $\pm 2000g$ and frequency response to 5000Hz, this sensor is easily mounted in hard to reach places on vehicles under test.

FEATURES



- -20 to +85°C Operating Range
- 2-10 Vdc Excitation
- ± 50 mV Zero Measurand Output
- Gas Damping
- Mechanical Overload Stops
- Designed for Adhesive Mounting

APPLICATIONS



- Crash Testing
- Impact Testing
- Off Road Testing
- Vehicle Testing

dimensions

53 Dimensions

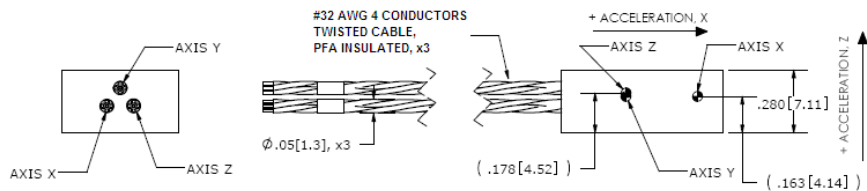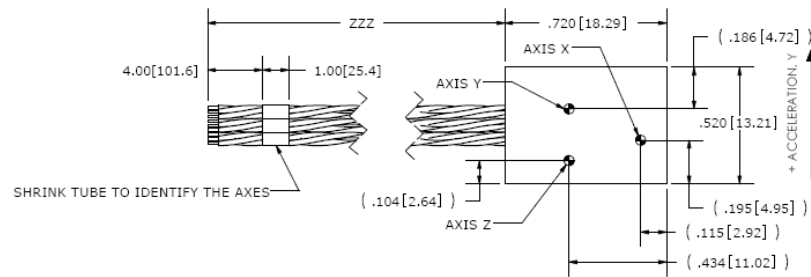

53A Dimensions

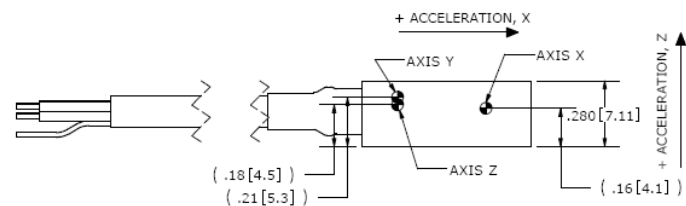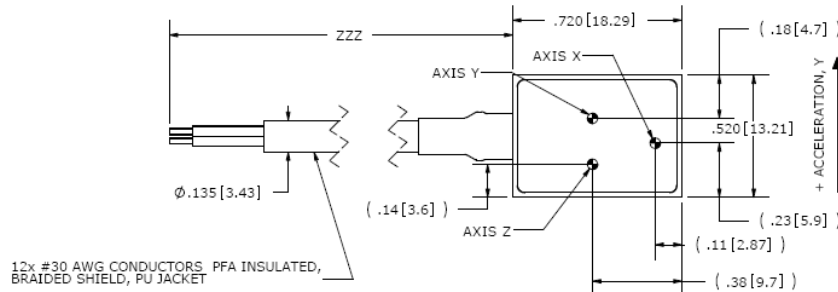

Model 53 & 53A Accelerometer

performance specifications

All values are typical at $\pm 24^{\circ}\text{C}$, 100 Hz and 10 Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1004 for Plug & Play DC Accelerometers.

Parameters

DYNAMIC

	± 50	± 200	± 500	± 2000	Notes
Range(g)	2	0.9	0.4	0.15	Ratiometric to Exc Voltage
Sensitivity (mV/g)	2	0.9	0.4	0.15	$\pm 1\text{dB}$
Frequency Response, Z Axis (Hz)	0-1000	0-2000	0-3000	0-4500	$\pm 1\text{dB}$
Frequency Response, X & Y Axis (Hz)	0-500	0-1000	0-1500	0-2500	$\pm 1\text{dB}$
Resonant Frequency (Hz)	4000	8000	15000	26000	
Damping Ratio	0.5	0.5	0.3	0.05	Typical
Shock Limit (g)	5000	5000	5000	5000	
Non-Linearity (% FSO)	± 1	± 1	± 1	± 1	Of Reading
Transverse Sensitivity (%)	<3	<3	<3	<3	

ELECTRICAL

Zero Acceleration Output (mV)	< ± 50				
Excitation (Vdc)	2 to 10				
Input Resistance (Ω)	2400-6000				
Output Resistance (Ω)	2400-6000				
Insulation Resistance ($M\Omega$)	>100				@100Vdc
Residual Noise ($\mu\text{V RMS}$)	<10				
Ground Isolation	Isolated from Mounting Surface				

ENVIRONMENTAL

Thermal Zero Shift (%FSO/ $^{\circ}\text{C}$ (%FSO/ $^{\circ}\text{F}$))	$\pm 0.05 (\pm 0.03)$				From 0 to $+50^{\circ}\text{C}$
Thermal Sensitivity Shift (%/ $^{\circ}\text{C}$ (%/ $^{\circ}\text{F}$))	$-0.20 \pm 0.05 (-0.11 \pm 0.03)$				From 0 to $+50^{\circ}\text{C}$
Operating Temperature ($^{\circ}\text{C}$ ($^{\circ}\text{F}$))	-20 to +85 (-4 to +185)				
Storage Temperature ($^{\circ}\text{C}$ ($^{\circ}\text{F}$))	-40 to +90 (-40 to +194)				
Humidity	Epoxy Sealed, IP65				

PHYSICAL

Case Material	Anodized Aluminum				
Cable, Model 53	#32 AWG Twisted Conductors, PFA Insulated				
Cable, Model 53A	#30 AWG Conductors PFA Insulated, Braided Shield, PU Jacket				
Weight (grams)	3.5				Without cable
Mounting	Adhesive				


Calibration supplied: CS-FREQ-0100 NIST Traceable Amplitude Calibration from 20Hz to $\pm 1\text{dB}$ Frequency Response Limit

Optional accessories: 101 Three Channel DC Signal Conditioner Amplifier
140 Auto-zero Inline Amplifier


Model 53 & 53A Accelerometer

schematic

53 Schematic

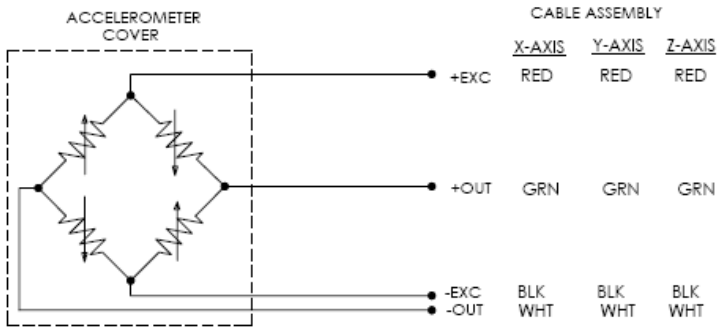

53A Schematic

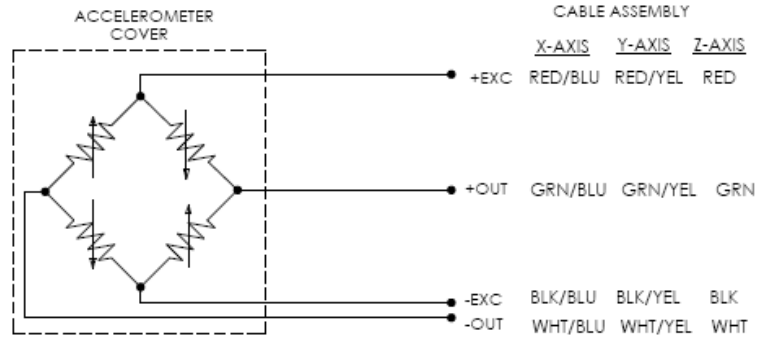

ordering info

PART NUMBERING Model Number+Range+Cable Length

53-GGGG-CCC-XXX

| | | Options (leave blank otherwise)
 | | Cable (360 is 360 inches)
 | Range (0500 is 500g)

Example: 53-0500-360
 Model 53, 500g, 360" (30ft) Cable

Optional Dash Number
 -003 5Vdc Calibration

53A-GGGG-CCC-XXX

| | | Options (leave blank otherwise)
 | | Cable (360 is 360 inches)
 | Range (0500 is 500g)

Example: 53A-0500-360
 Model 53A, 500g, 360" (30ft) Cable

联系方式



深圳市亿为测控电子有限公司
 Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com